



Item	Qty.	Description
1	1	Base Plate
2	1	43.5" Vertical Extrusion
3	1	Counter Bottom
4	4	12" Z45 Horizontal Extrusion
5/5A	1/1	20" Horizontal Extrusion
6/6A	1/1	30" Vertical Extrusion

Steps:





- 1) Attach base plate [1] to vertical extrusion [2].
- 2) Slide Counter Bottom [3] over vertical [2].
NOTE: The counter bottom will be "free floating" until counter top is attached.
- 3) Connect horizontals [4] to vertical [2].
- 4) Place counter top on assembled pedestal base; attach to [3] using bolts provided
- 5) Attach horizontal extrusion [5] to vertical [2].
- 6) Connect vertical extrusions [6] & [6A] to lower horizontal [5].
- 7) Attach upper horizontal [5A] to lower frame assembly.
- 8) Plug power cord into power source.

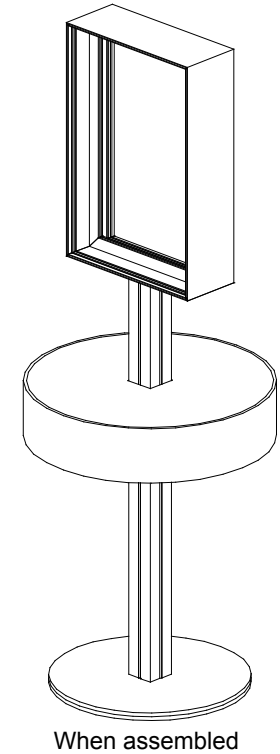

Plugs into inside of counter to supply power for USB chargers.

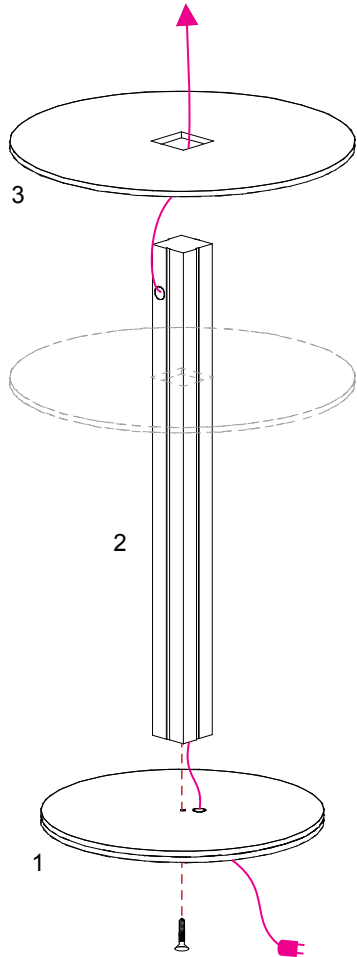


Plugs into inside of counter to supply power for USB chargers.

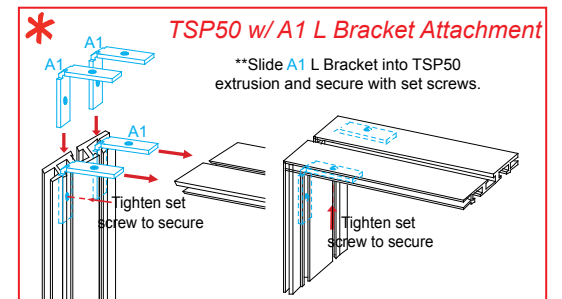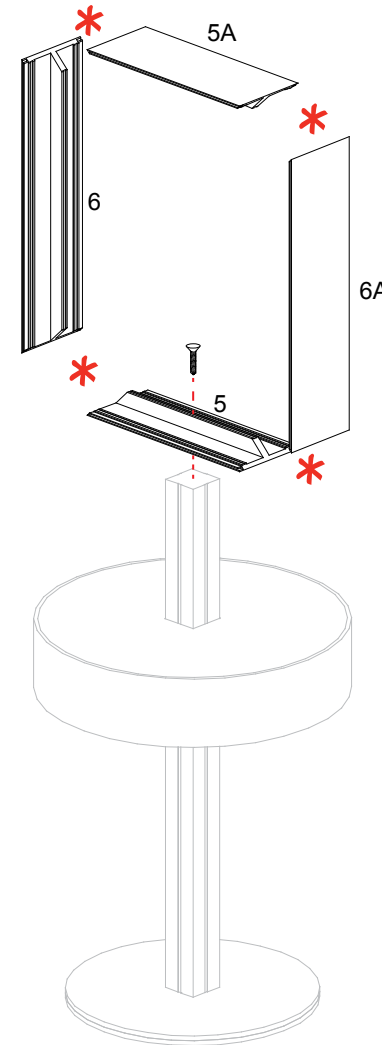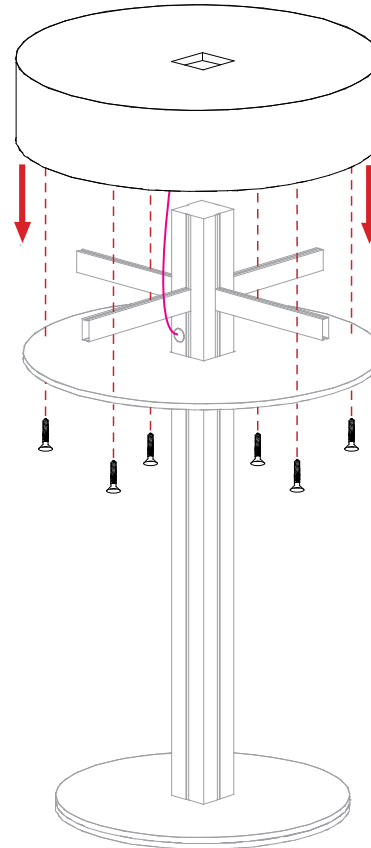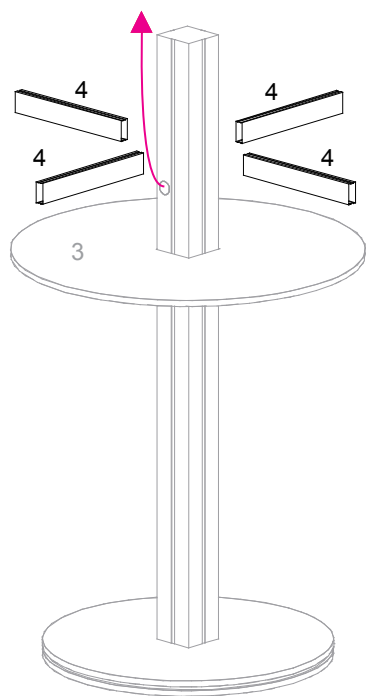


WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

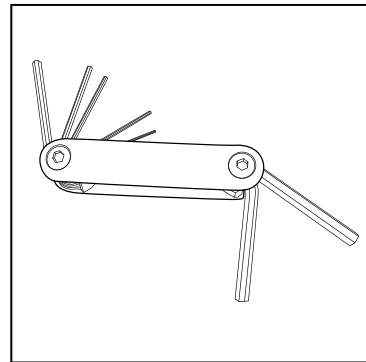

Hex Tool - Essential for Assembly

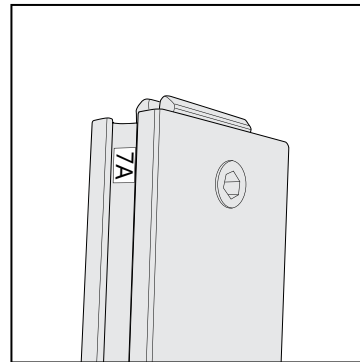

Part Identification - Numbering




WARNING

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly

- For loss prevention, tighten all setscrews and locks during disassembly

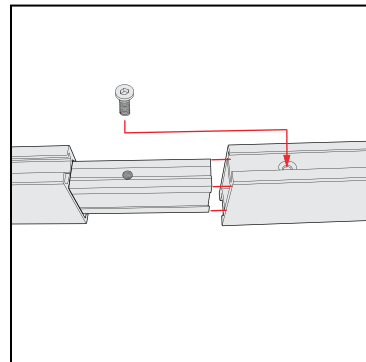

Spline Connection

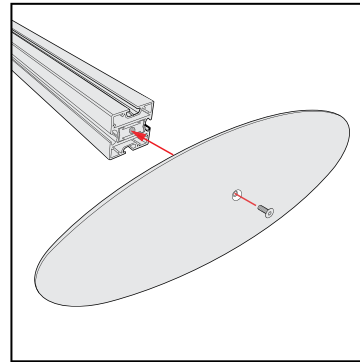


Base Plate & Extrusion Connection




DO NOT USE POWER TOOLS



LADDERS OR LIFTS
MAY BE REQUIRED

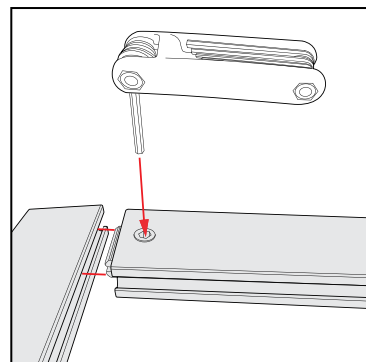

Extrusion & Lock Connection

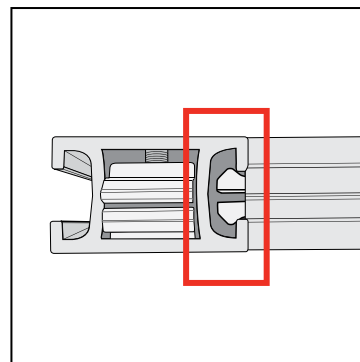

Engaged Lock



ALL CONNECTIONS MUST
BE TIGHTLY SECURED

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL
SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING